

SAM4S Ellix-40 II

Thermal Receipt Printer

The innovative Ellix-40 II POS printer from Sam4s provides a unique LCD display that displays operator messages, errors and guides you through step by step program options.



- Easy Paper Loading & Jam Free/Apply Auto Cutter.







- Aluminium Main Frame Structure for Robustness.

SAM4S
Comes with an
LCD Display
Panel



The Sam4s Ellix-40 II is easy to setup – easier to use and support.

Key Features - At A Glance

-  (80 x 80) Thermal Receipt Paper
-  Drop & Load Printing
-  Auto Cutter
-  USB On Board
-  Built-In Wall Mount (Option)



Ellix-40 II

Thermal Receipt Printer



- Energy Star Certified Reduces Energy Costs & Carbon Foot Print.
- Dual Interface Serial & USB as Standard.
- 270mm Per Second Print Speed.
- Drop & Print Loading.
- Prints Watermarks.
- Anti-Jam Technology.
- Stores User Defined Graphic Logos, Coupons or Advertising Messages.
- Support Barcode Printing Including QR Codes.
- Optional Splash Cover.
- Optional Kitchen Bell.

Features

- LCD Displays Operator Messages, Errors & Guides the Operator Through Setup & Option Selections.
- Aluminium Main Frame Insures Durability and Quiet Operation.
- Black/Red or Black/Blue Two-Colour Printing Available on Appropriate Paper.
- Accepts 2-1/4" (58mm) or 3-1/8" (80mm) Thermal Paper Rolls.
- Standard Near-End Paper Sensor.
- Guillotine Style, Jam-Free Auto-Cutter – Selectable Full or Partial Cut.
- Stores Up to 255 Images (384) KBytes in Non-Volatile Memory.
- Easy-To-Use Utilities Simplify Loading Images & Watermarks.
- Dual Interface – USB Interface is on the Main Board.

SAM4S ELLIX-40 SPECIFICATION

| | | |
|------------------------|--|--|
| PRINTING METHOD | | Direct Thermal Line Printing |
| PRINTING SPEED | Mono Paper 80mm Mono Paper 58mm Two Colour Paper | Maximum 270mm/Sec. (63 Lines/Sec) Maximum 150mm/Sec. (36 Lines/Sec) Maximum 100mm/Sec. (24 Lines/Sec). |
| RESOLUTION | | 180dpi (Dots Per Inch) |
| PRINTING WIDTH | Mono Paper 80mm Mono Paper 58mm | Maximum 72mm 48mm (Maximum 54mm) |
| PAPER | Loading Dimension Thickness | Drop-In Type Maximum 58/80 x 83mm 0.06 - 0.08mm |
| AUTO CUTTER | | Guillotine Type (Jam Free) |
| MEMORY | PGM Memory Data Memory Data Buffer | 4 Megabyte 8 Megabyte 64 KB |
| RELIABILITY | Mechanism (MCCBF)/ TPH/Auto Cutte | 70,000,000 Lines/1 x 10 ⁸ Pulse, 150 Km/ 1,500,000 Cut |
| BARCODE | | UPC-A, UPC-E, EAN8, EAN13, Code 39, Code 93, Code 128, ITF, CODABAR, PDF417, QR Code |
| DRIVER | | Windows Driver, OPOS Driver, JPOS Driver, Mac Driver, Linux Driver |
| DRAWER PORT | | 2 Port (+24V) |
| INTERFACE | | USB Only, USB + RS-232, USB + Parallel, USB + Ethernet, USB + Wi-Fi, USB + Bluetooth |




- Built-In Wall Mount Capability (Option).




- Automatic Display Pivot Function When Wall Mounted.

Ports & Connectivity

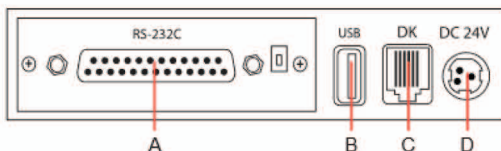

- A:** Serial (Shown), Parallel, Ethernet, and USB (B) Interface Boards Available.
- B:** USB.
- C:** Cash Drawer (2 x Drawer 24v).
- D:** DC 24V Power-In.

YOUR LOCAL DEALER IS

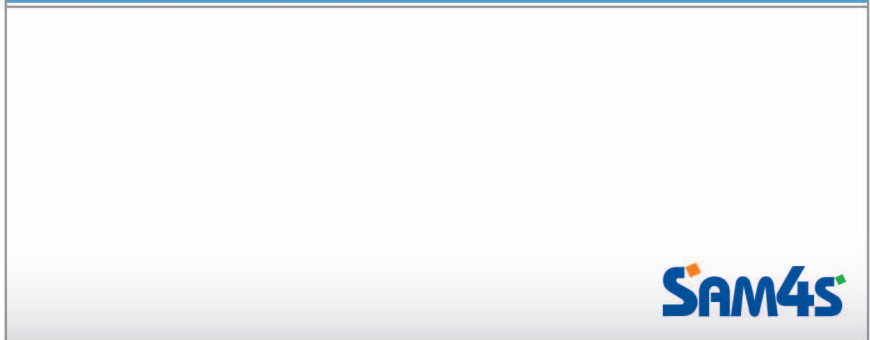

Distributed in the UK & NI by YCR Distribution Ltd. 01924 438238. Whilst every effort has been made to provide current photographs, descriptions and specifications the manufacturers reserve the right to change specifications, illustrations, model number and appearance of any item without prior notifications and therefore will not be held responsible for any variations.